

Technical parameters

Model(s):	Outdoor unit: AW-YHPSA10-H91 Indoor unit: ODMA-100T-09M22-19/25
Air-to-water heat pump:	YES
Water-to-water heat pump:	NO
Brine-to-water heat pump:	NO
Low-temperature heat pump:	NO
Equipped with a supplementary heater:	NO
Heat pump combination heater:	NO
Declared climate condition:	AVERAGE

Parameters are declared for medium-temperature application.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.7	kW	Seasonal space heating energy efficiency	η_s	136.6	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7°C	Pdh	6.78	kW	Tj = -7°C	COPd	2.24	-
Tj = 2°C	Pdh	4.28	kW	Tj = 2°C	COPd	3.42	-
Tj = 7°C	Pdh	2.77	kW	Tj = 7°C	COPd	4.52	-
Tj = 12°C	Pdh	1.58	kW	Tj = 12°C	COPd	5.68	-
Tj = bivalent temperature	Pdh	6.78	kW	Tj = bivalent temperature	COPd	2.24	-
Tj = operating limit	Pdh	5.38	kW	Tj = operating limit	COPd	1.83	-
For air-to-water heat pumps: Tj = -15°C	Pdh	-	kW	For air-to-water heat pumps: Tj = -15°C	COPd	-	-
Bivalent temperature	Tbiv	-7	°C	For air-to-water heat pumps: Operation limit temperature	TOL	-10	°C
Cycling interval capacity for heating	Pcyc	-	kW	Cycling interval efficiency	COPcyc	-	-
Degradation co-efficient (**)	Cdh	0.9	--	Heating water operating limit temperature	Wtol	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	Poff	0.014	kW	Rated heat output (**)	Psup	2.29	kW
Standby mode	Psb	0.014	kW	Type of energy input	Electrical		
Thermostat-off mode	Pto	0.024	kW				
Crankcase heater mode	Pck	0.000	kW				

Other items							
Capacity control	variable			For air-to-water heat pumps: Rated air flow rate, outdoors	-	4030	m³/h
Sound power level, indoors/outdoors	L _{WA}	42/60	dB	For water-or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m³/h
Annual energy consumption	Q _{HE}	4539	kWh				

For heat pump combination heater:							
Declared load profile	-			Water heating energy efficiency	η_{wh}	-	%
Daily electricity consumption	Q _{elec}	-	kWh	Daily fuel consumption	Q _{fuel}	-	kWh
Annual electricity consumption	AEC	-	kWh	Annual fuel consumption	AFC	-	GJ

Contact details	AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France						
-----------------	--	--	--	--	--	--	--

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
 (**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.



ENERG

енергия · ενέργεια

Y

IJA

IE

IA

Airwell

AW-YHPSA10-H91

ODMA-100T-09M22-19



A⁺⁺⁺

A⁺⁺

A⁺

A

B

C

D

A⁺⁺



A⁺

A

B

C

D

E

F

A⁺



40 dB



60 dB



7 kW

8 kW

9 kW





ENERG

енергия · ενεργεια

Y

IIA


IE

IA

Airwell

AW-YHPSA10-H91

ODMA-100T-09M22-25

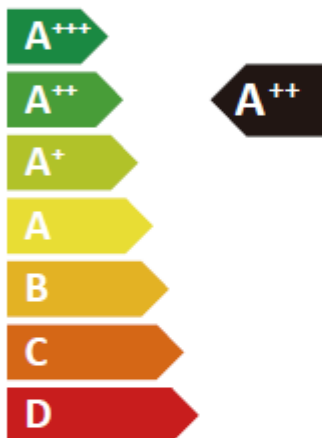

40 dB



60 dB



7 kW

8 kW

9 kW

